

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

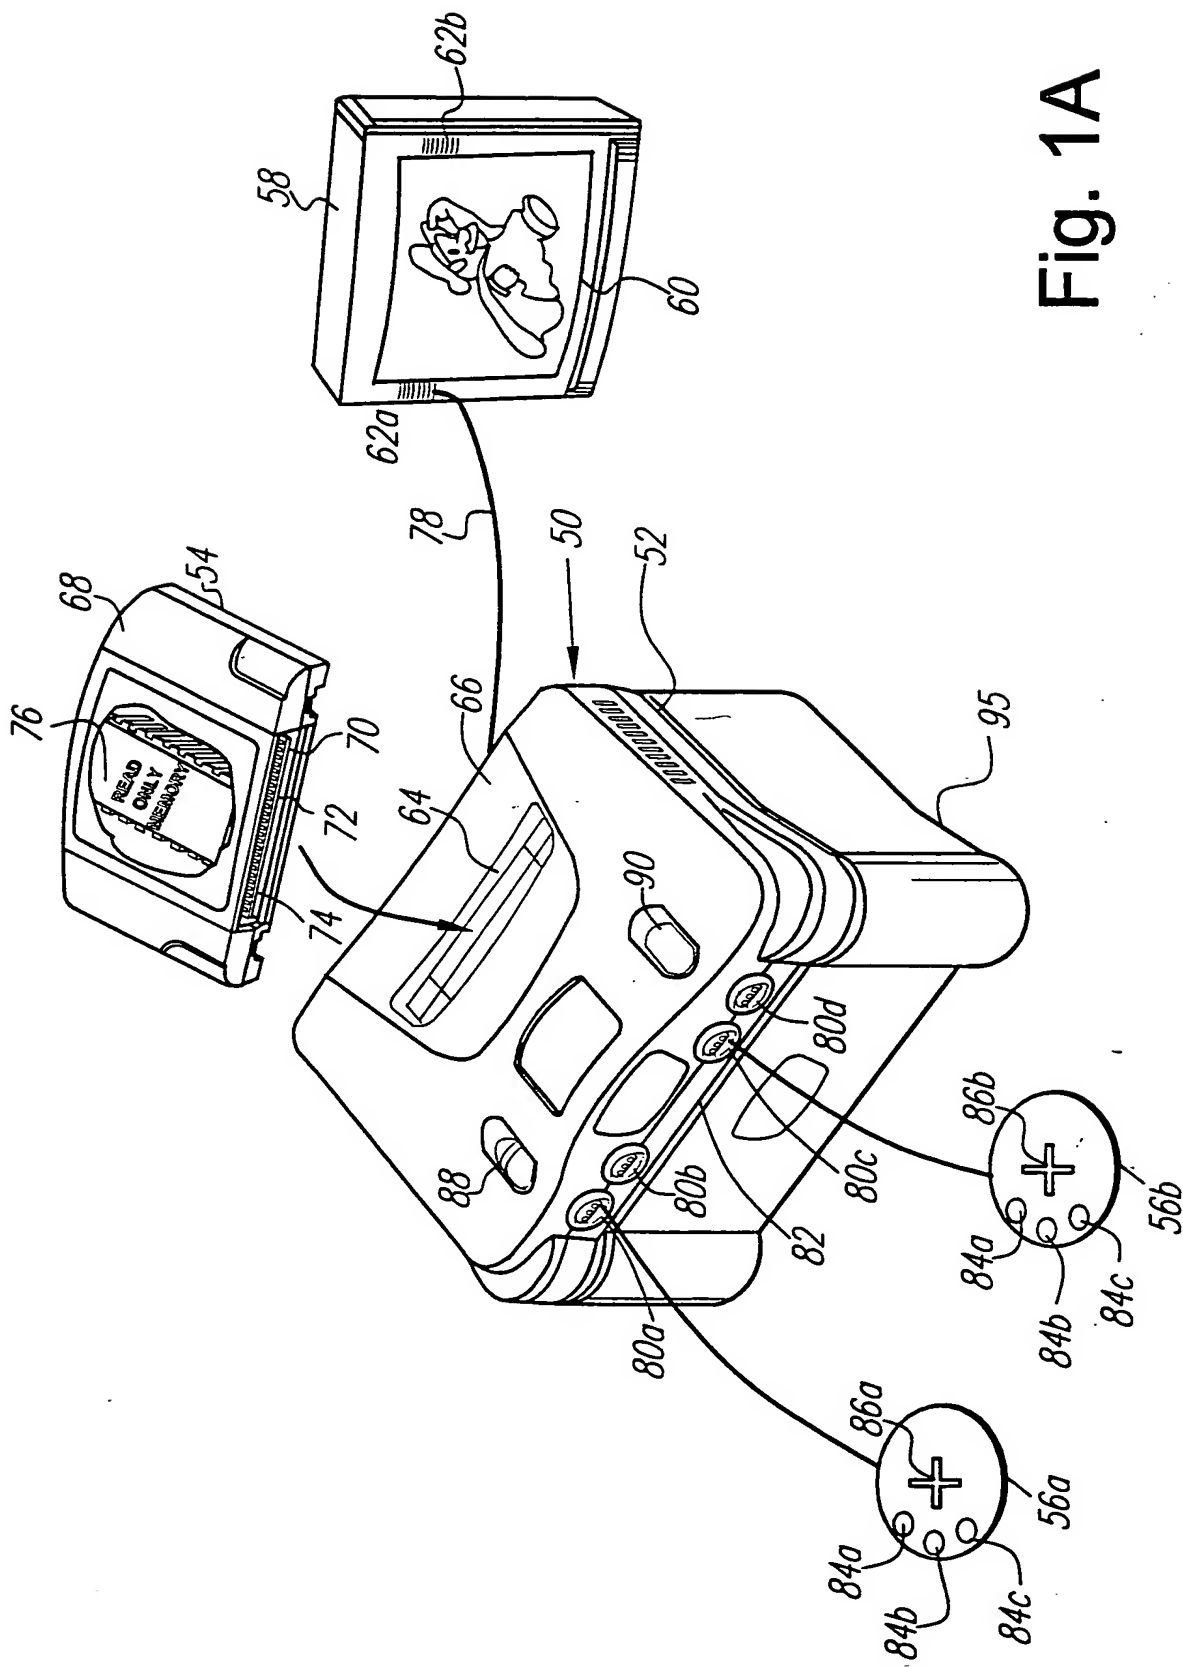


Fig. 1A

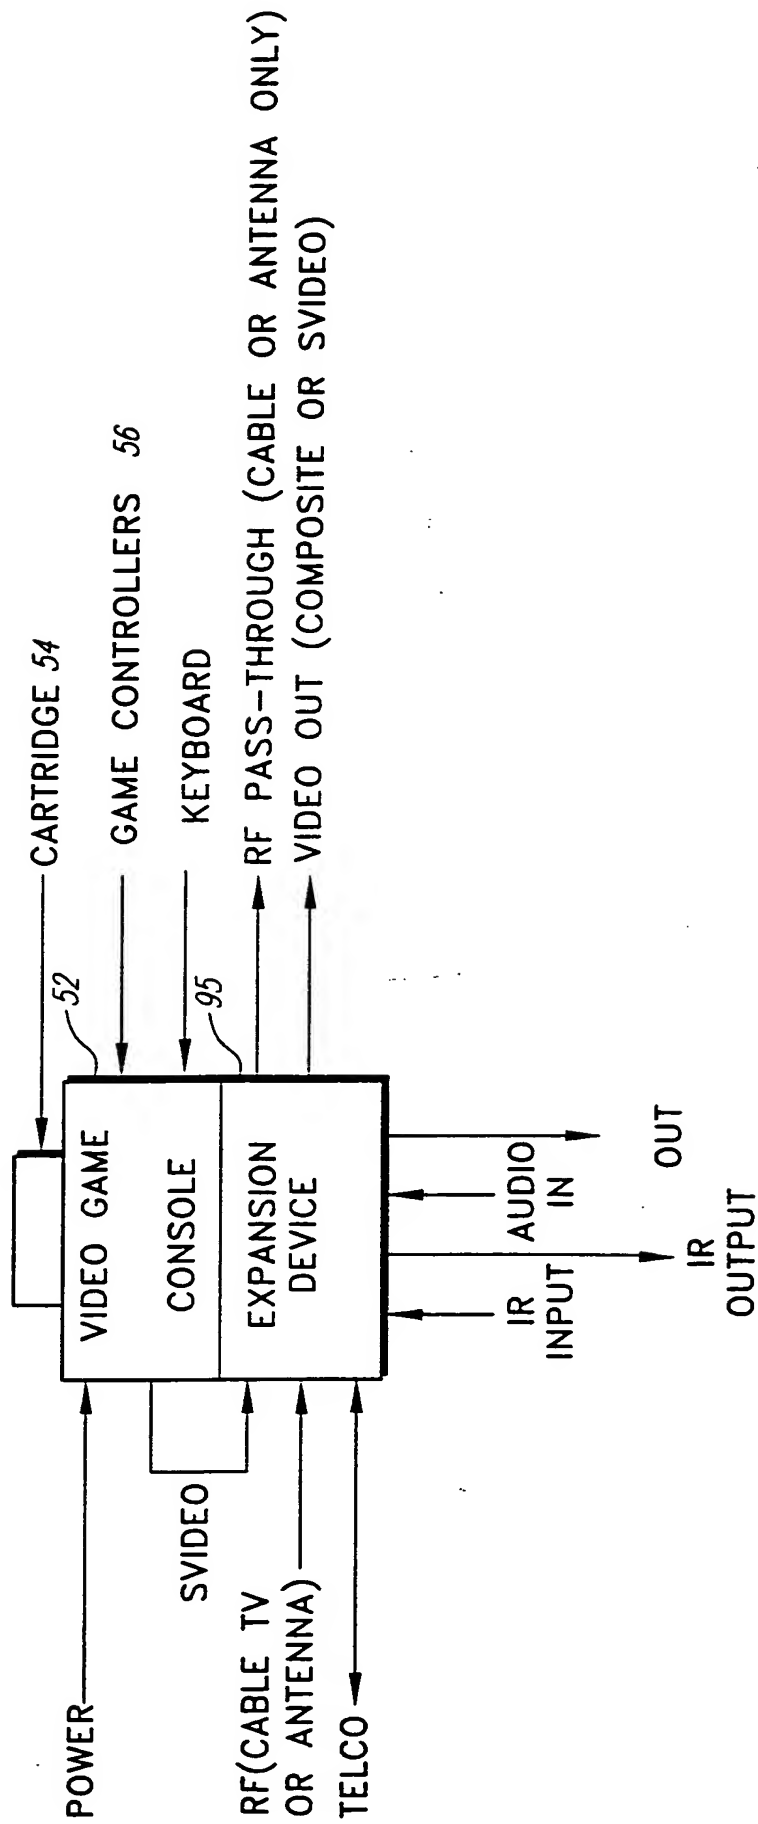


Fig. 1B

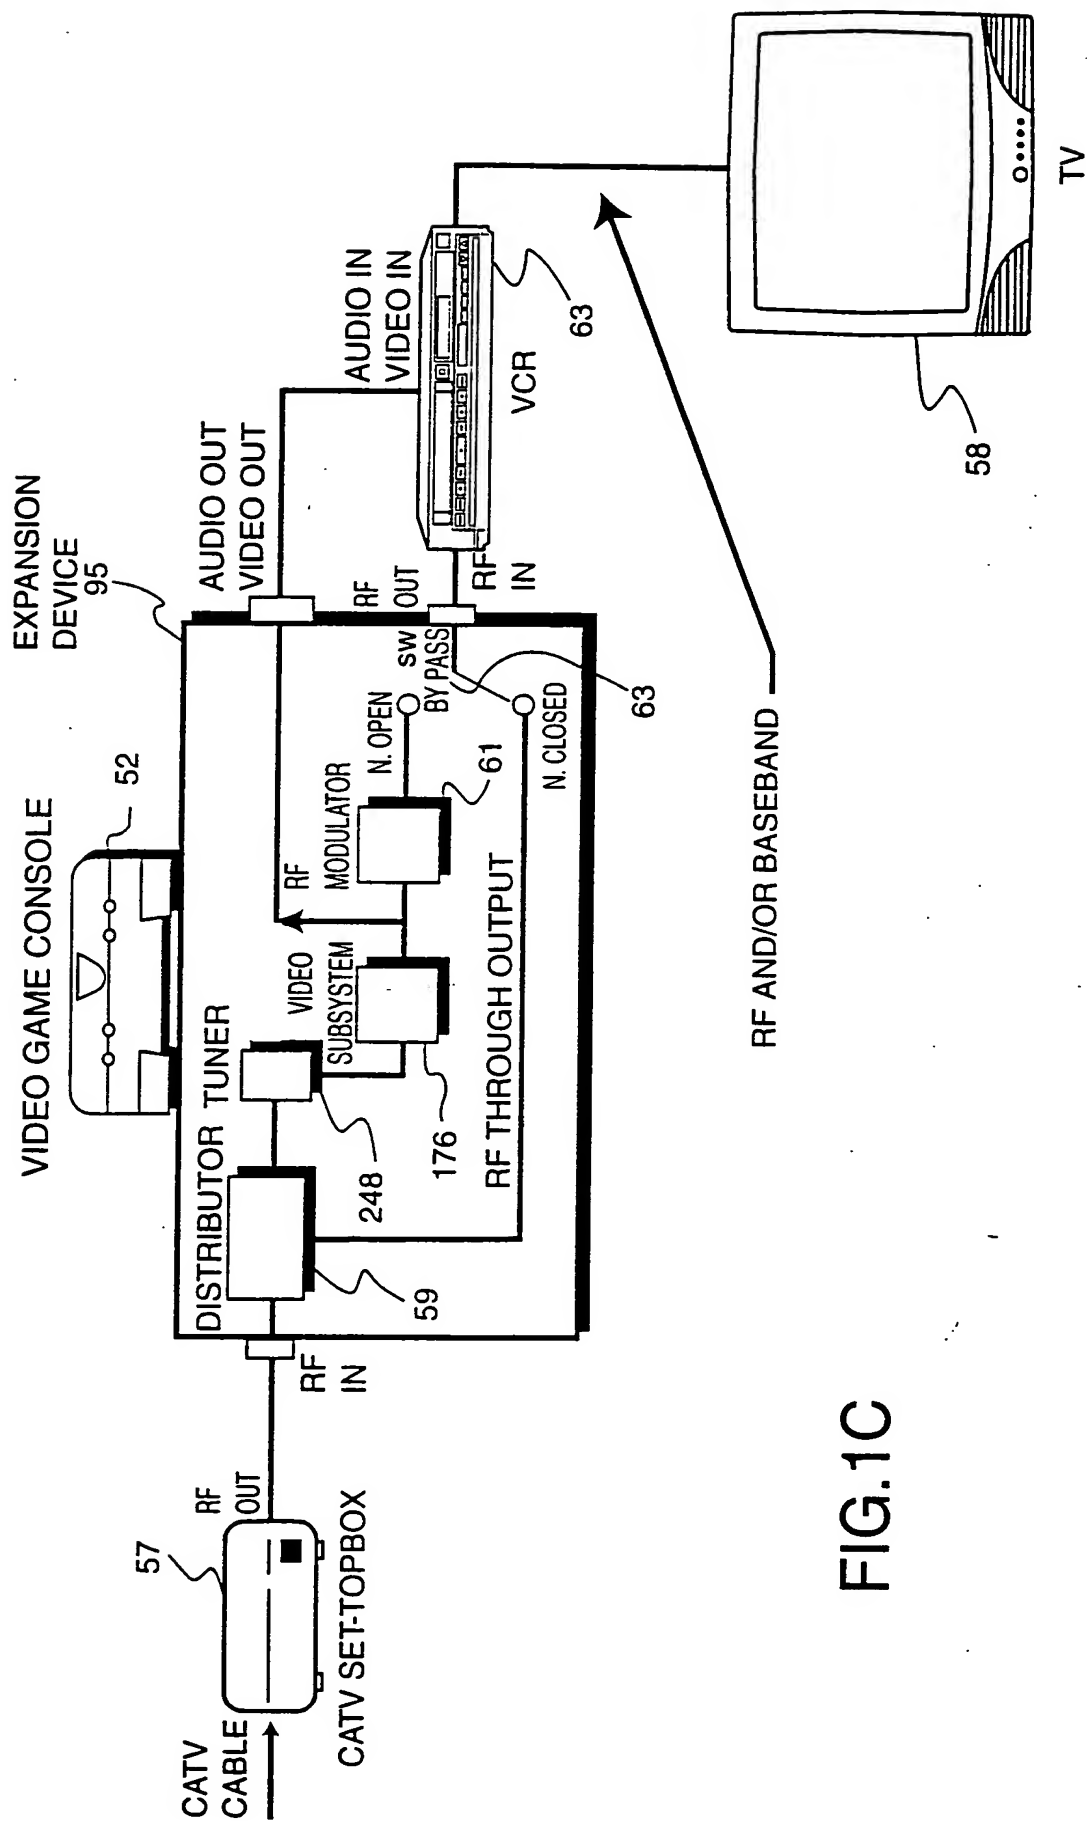
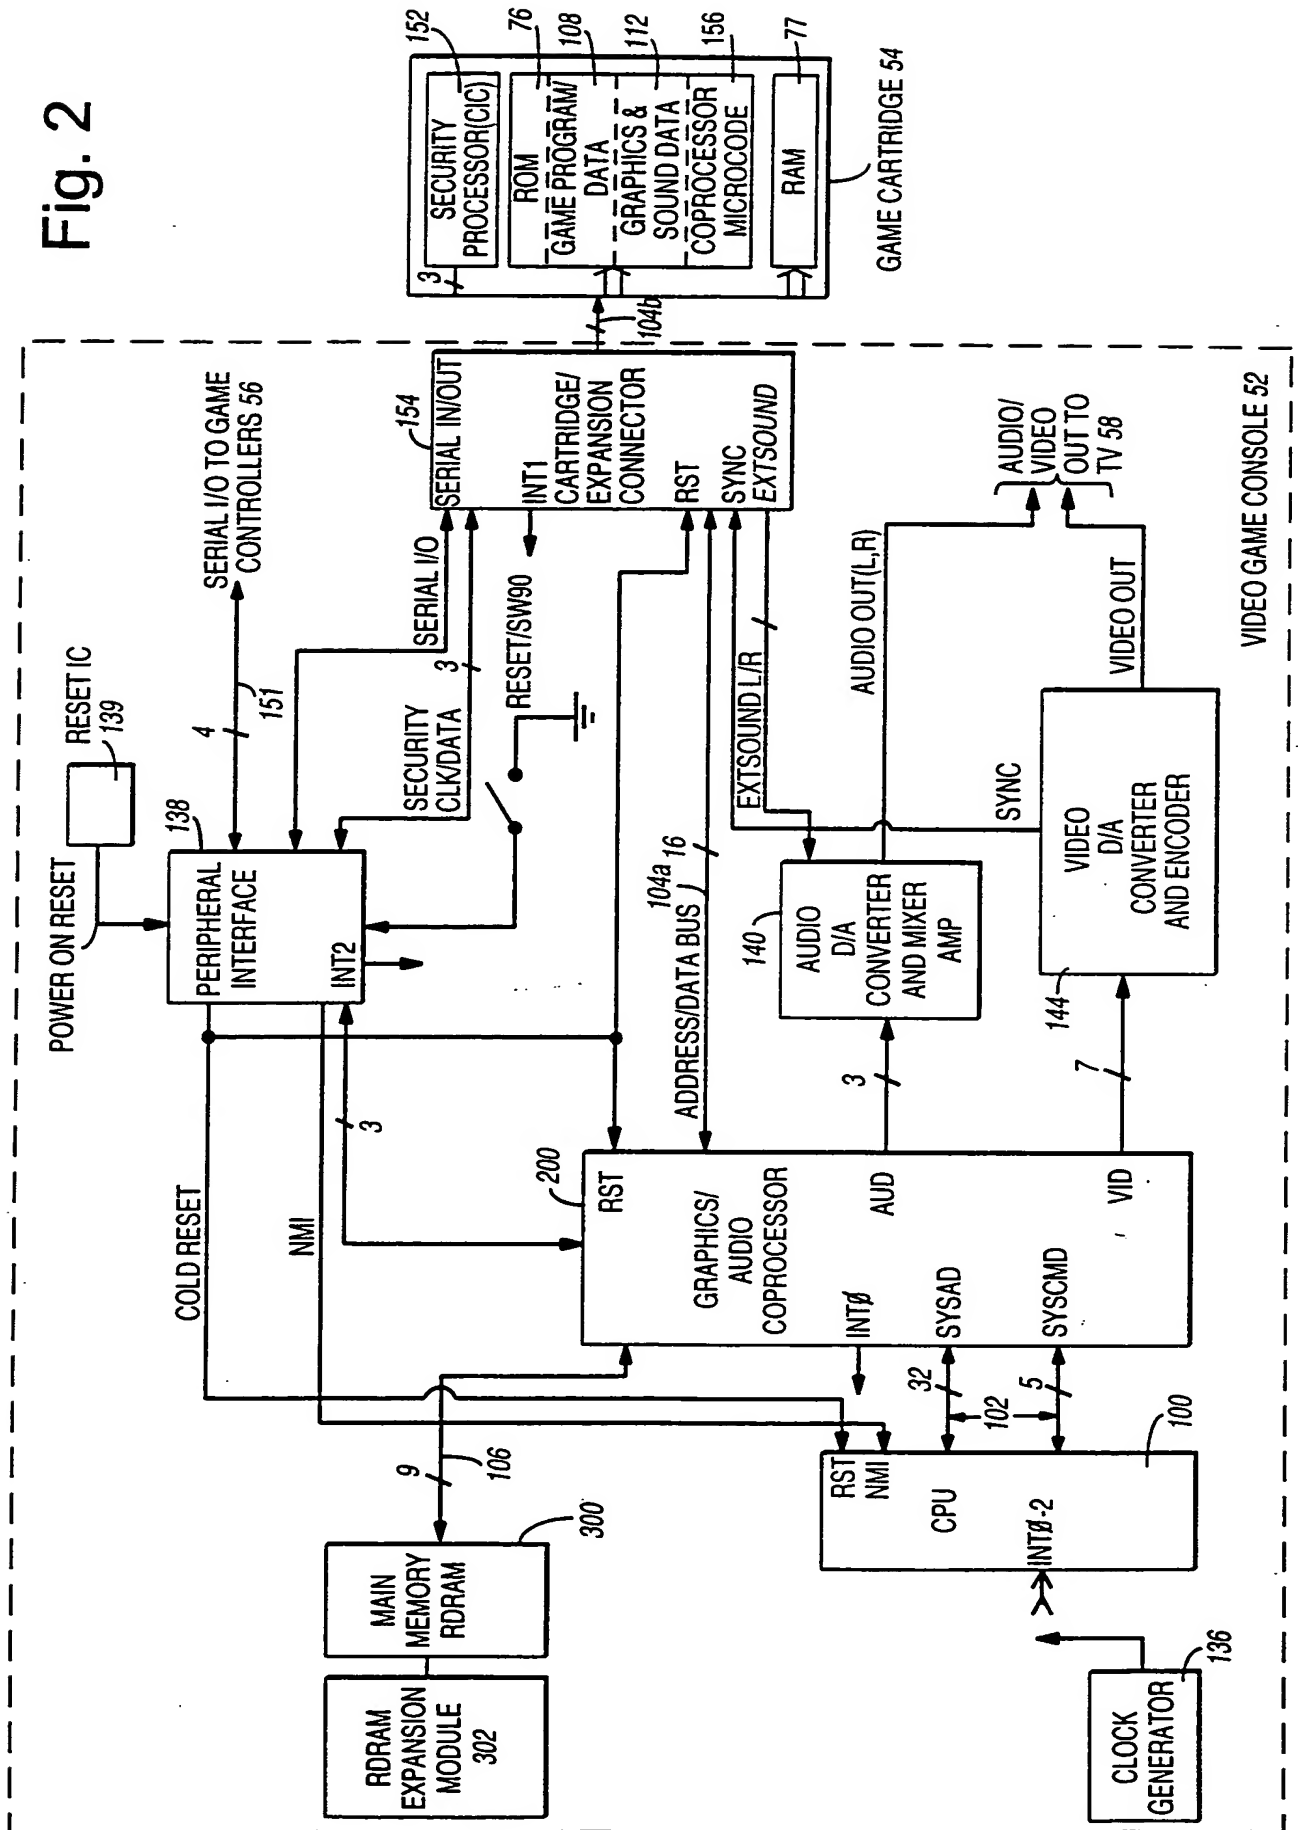


FIG.1C

Fig. 2



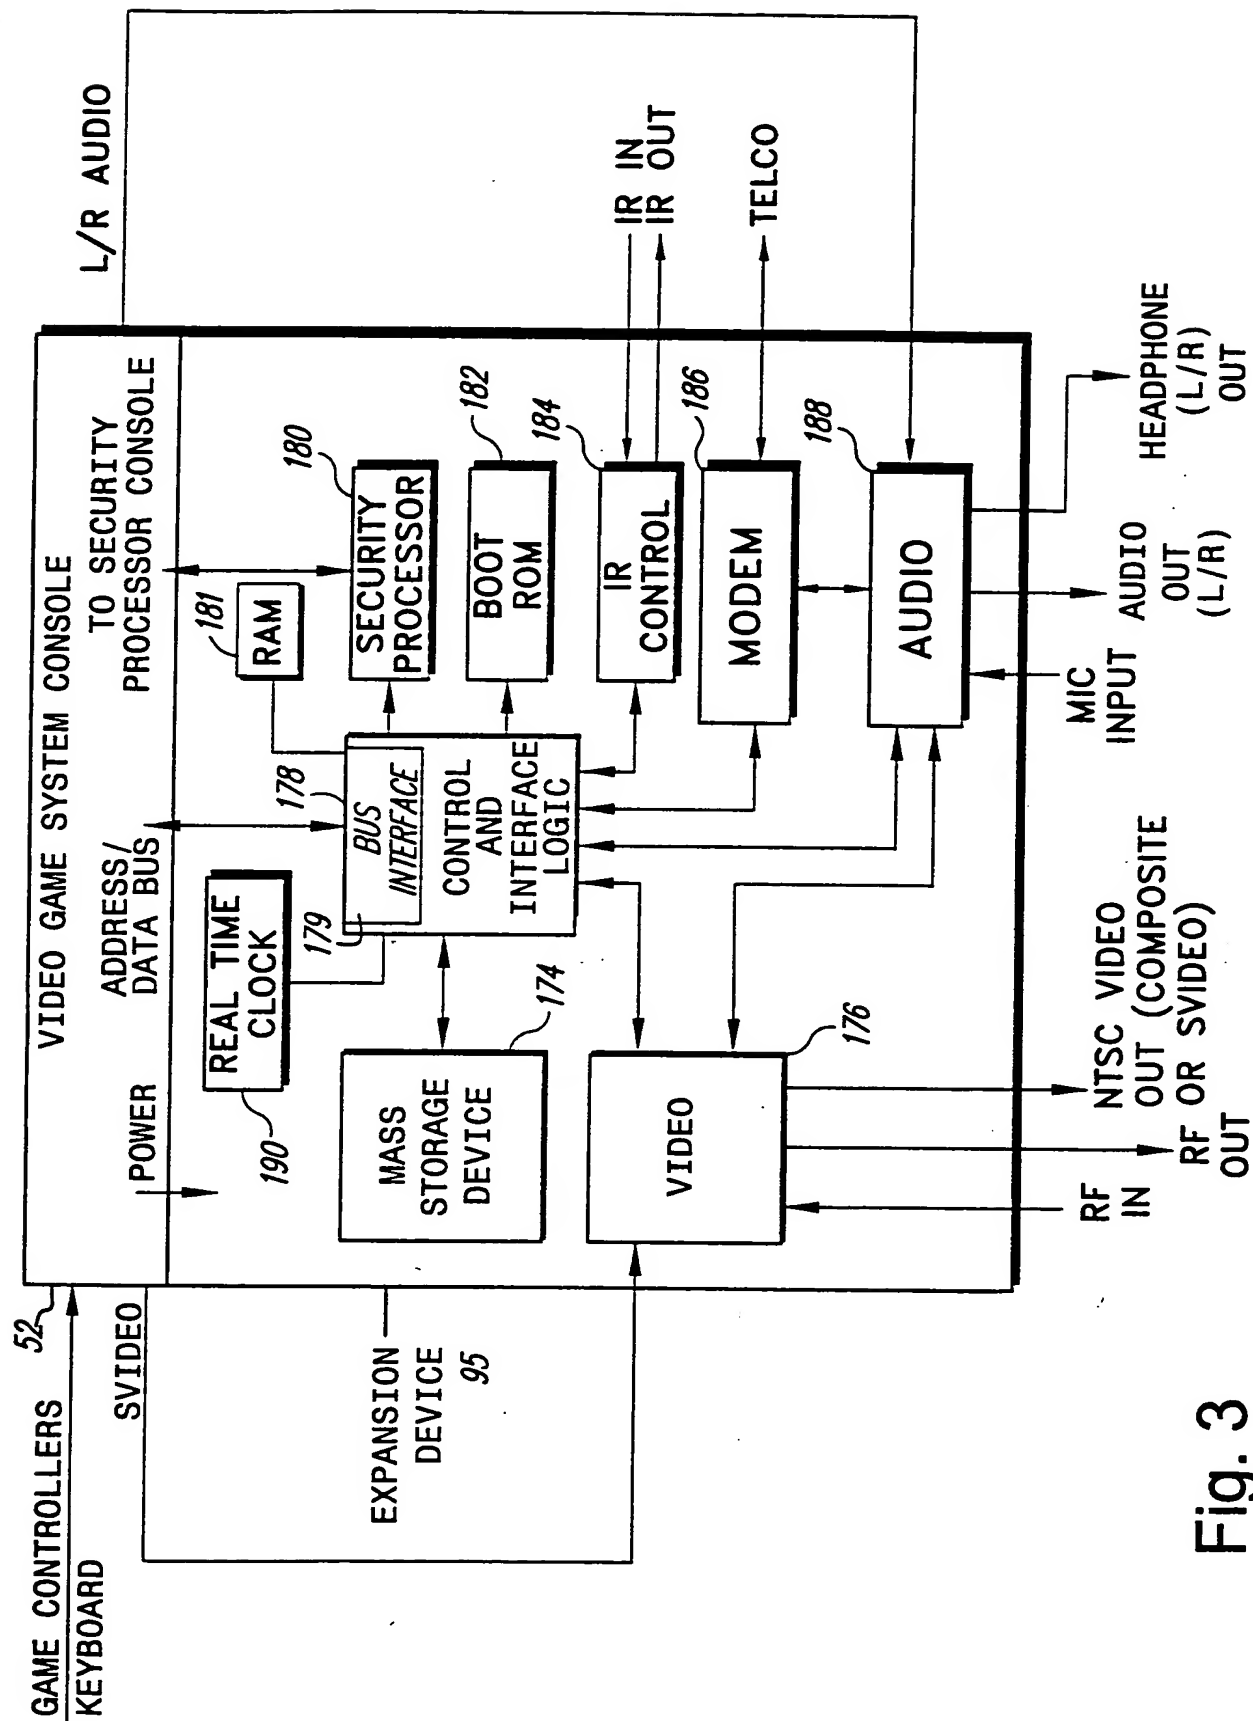


Fig. 3


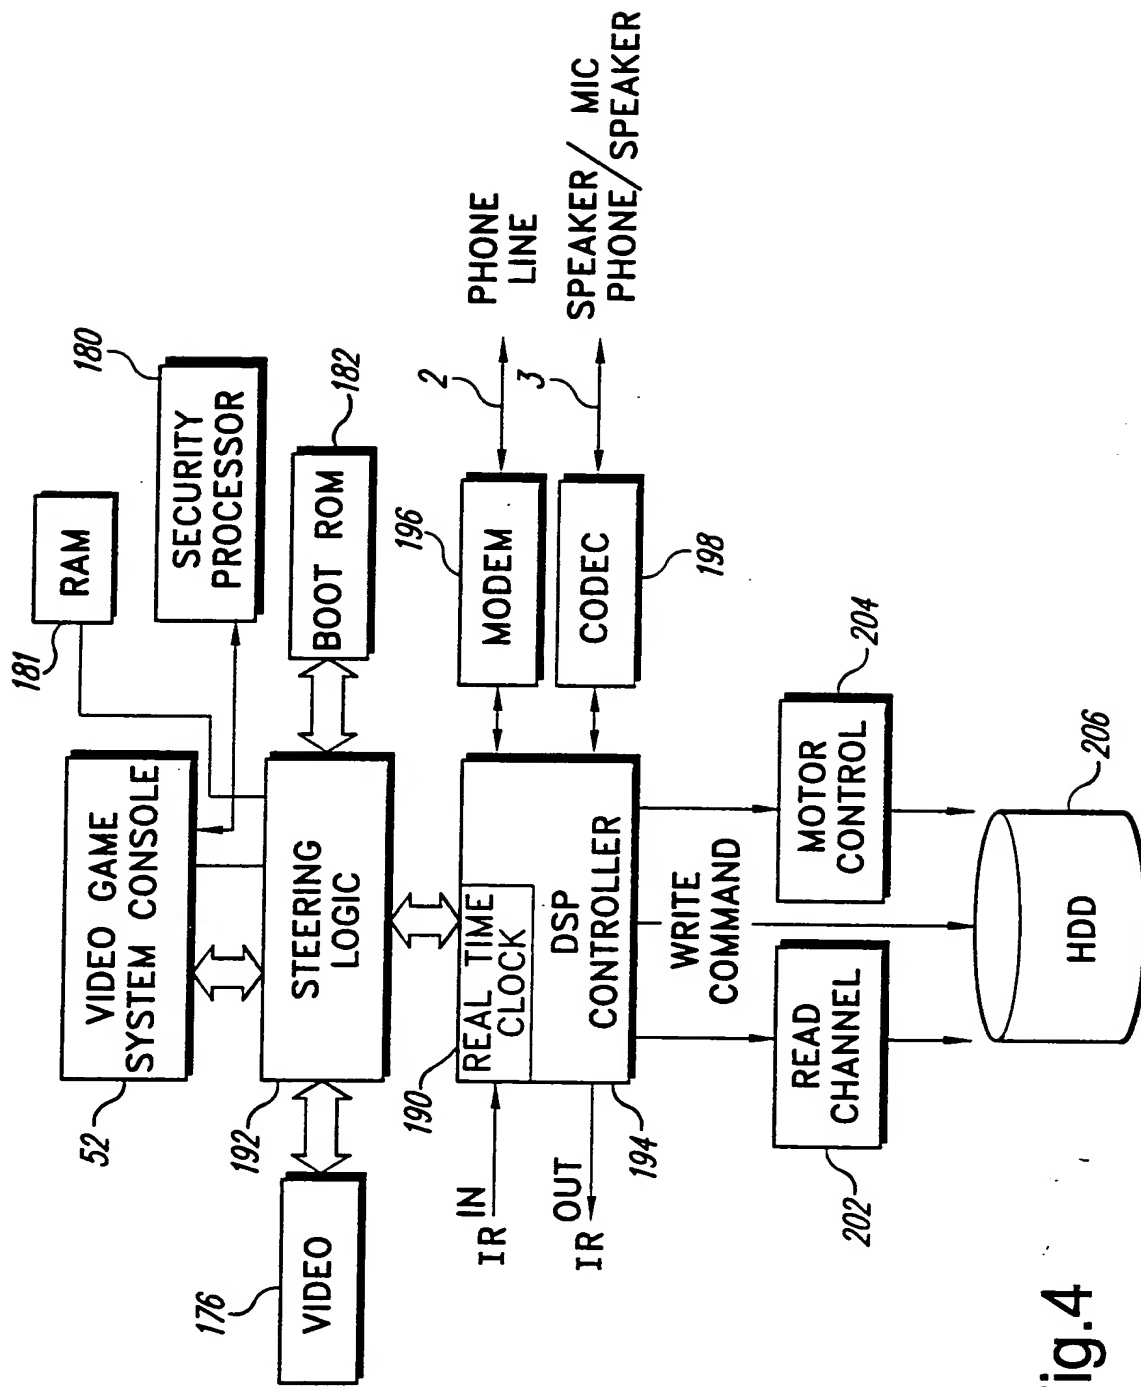


Fig.4

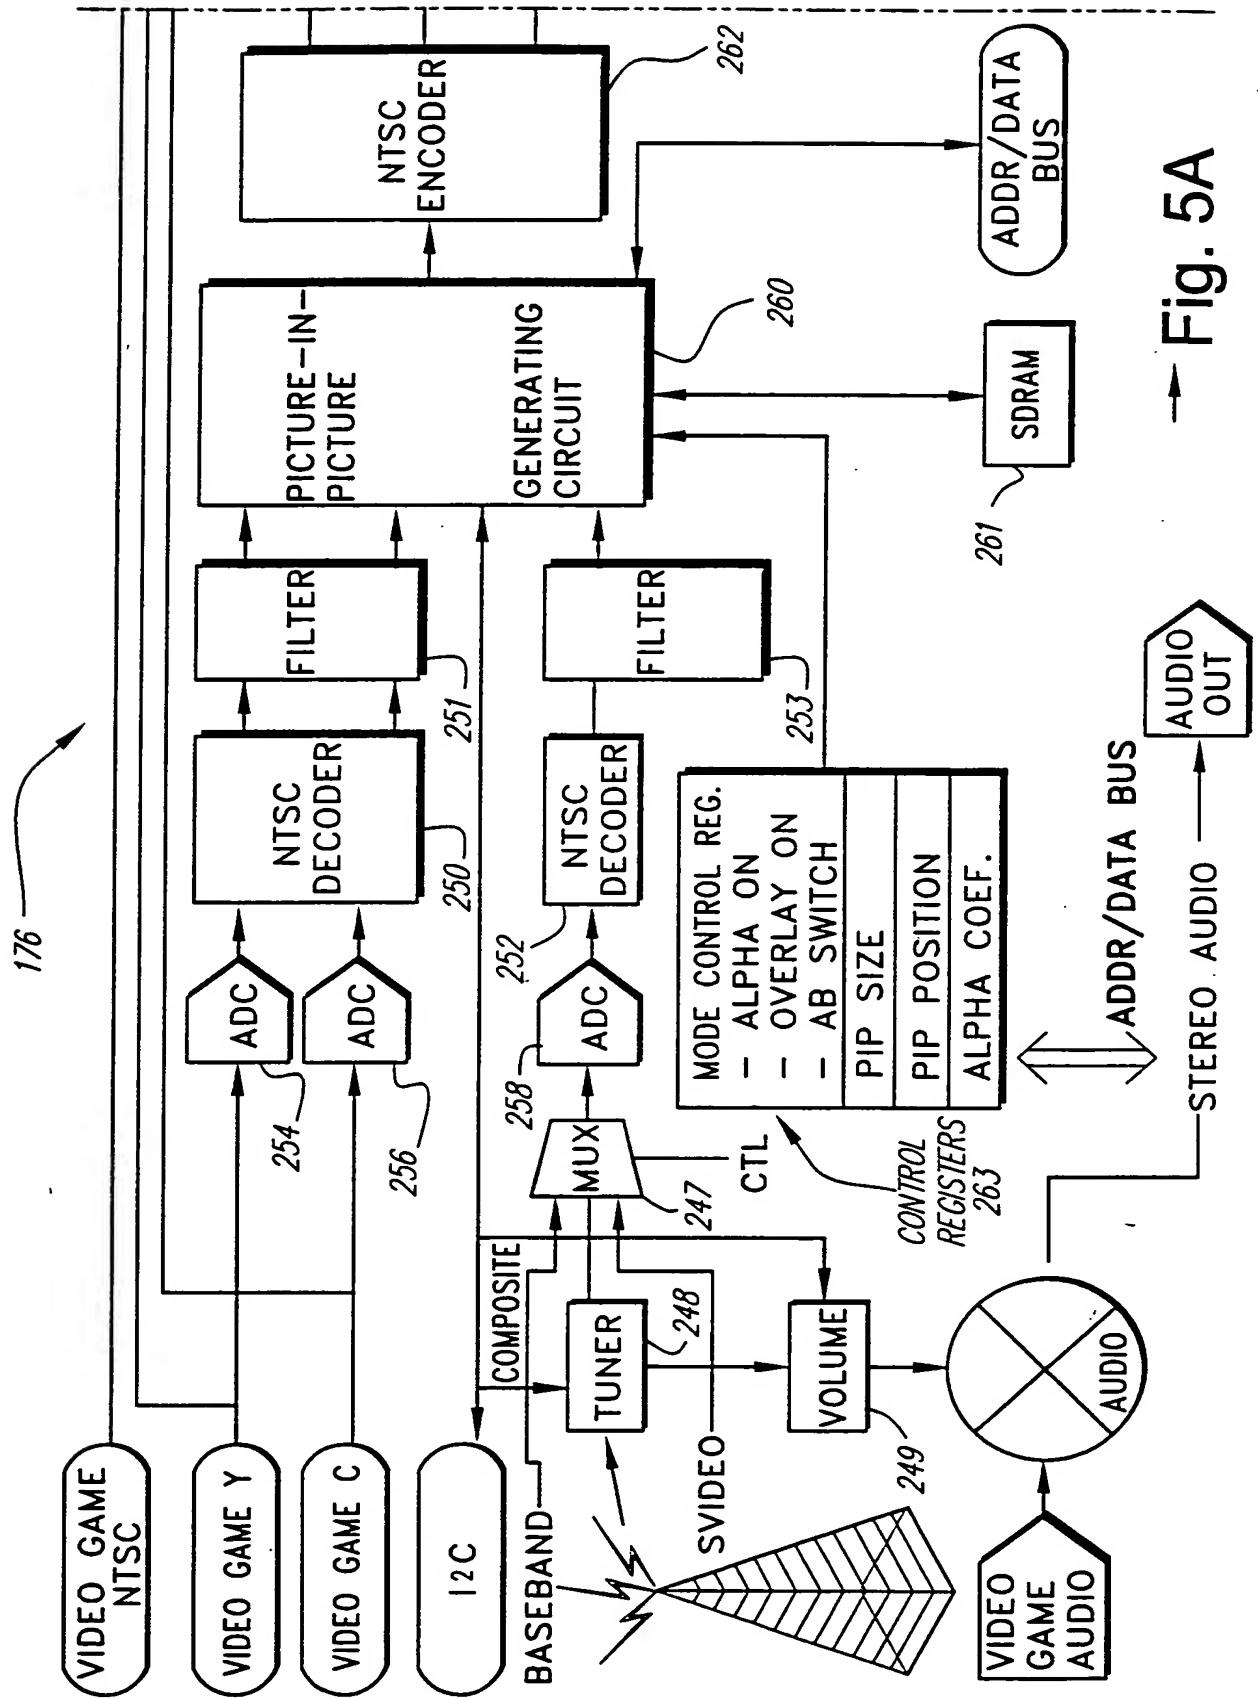

→ Fig. 5A

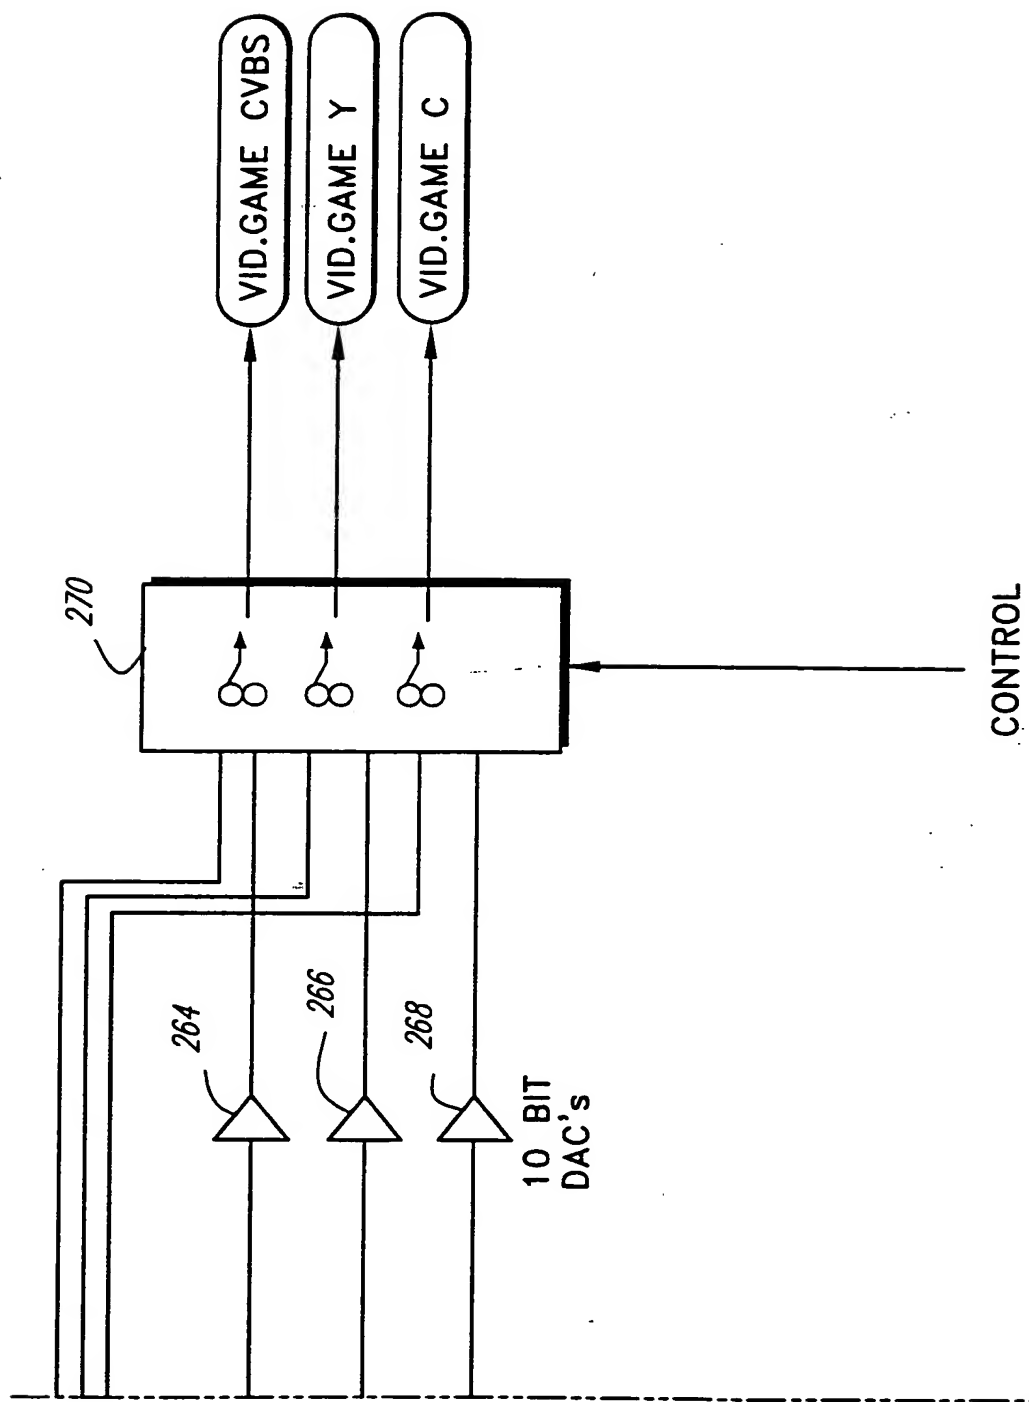
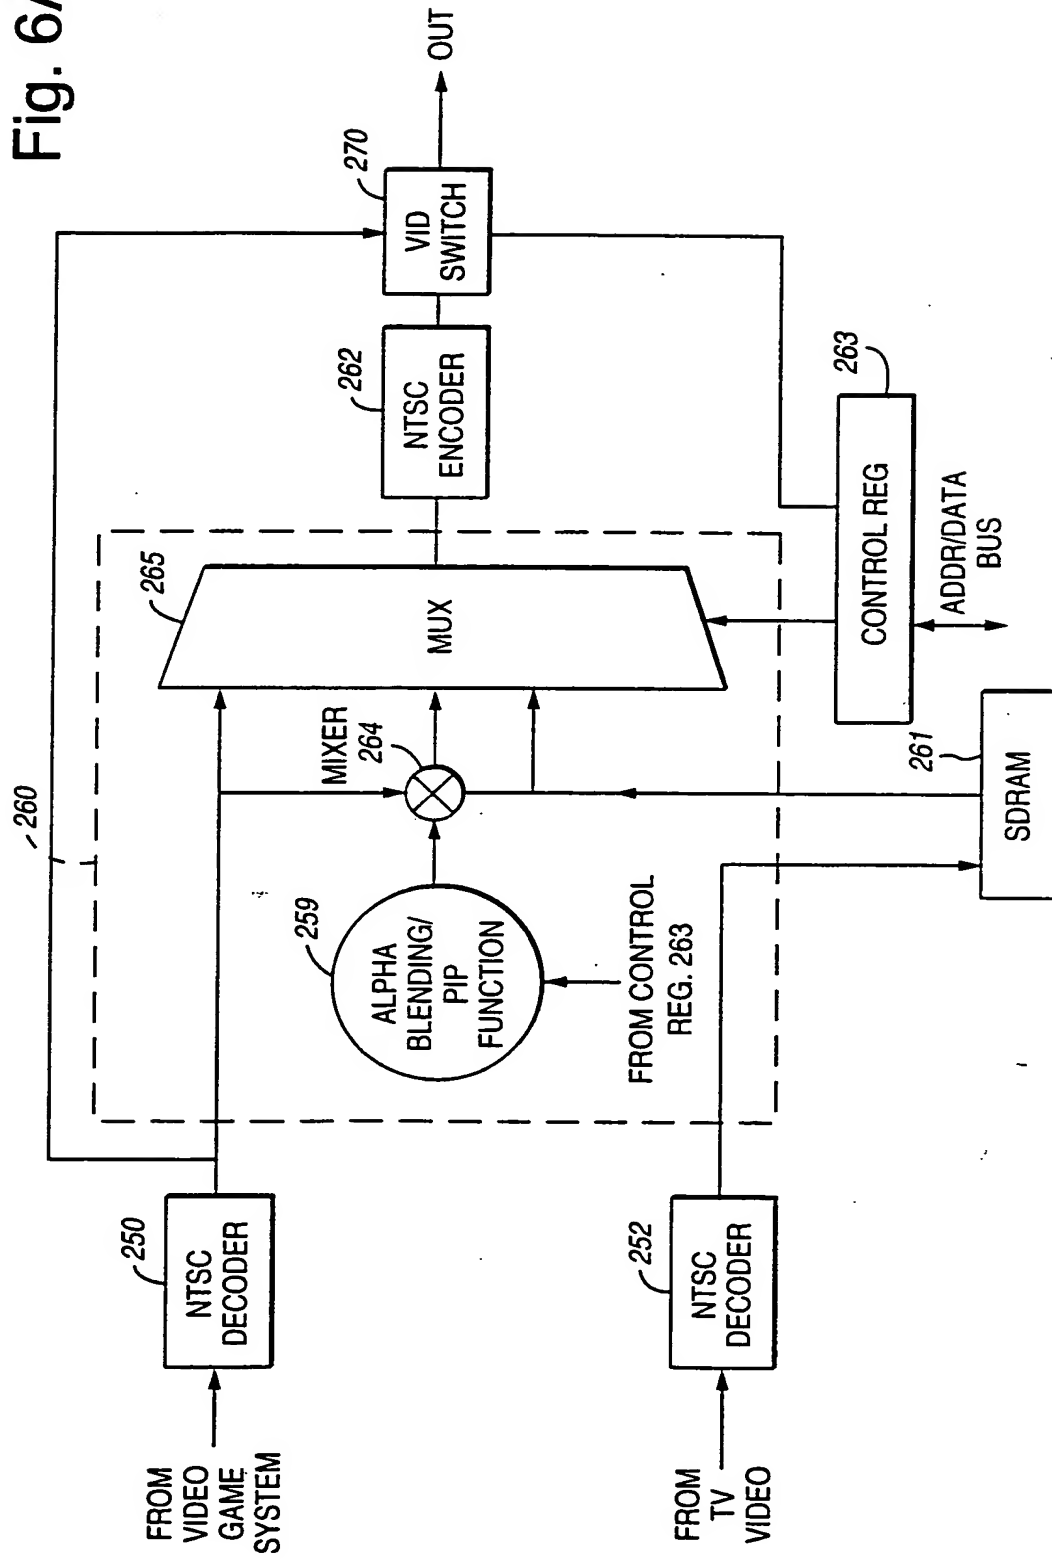


Fig. 5B

Fig. 6A



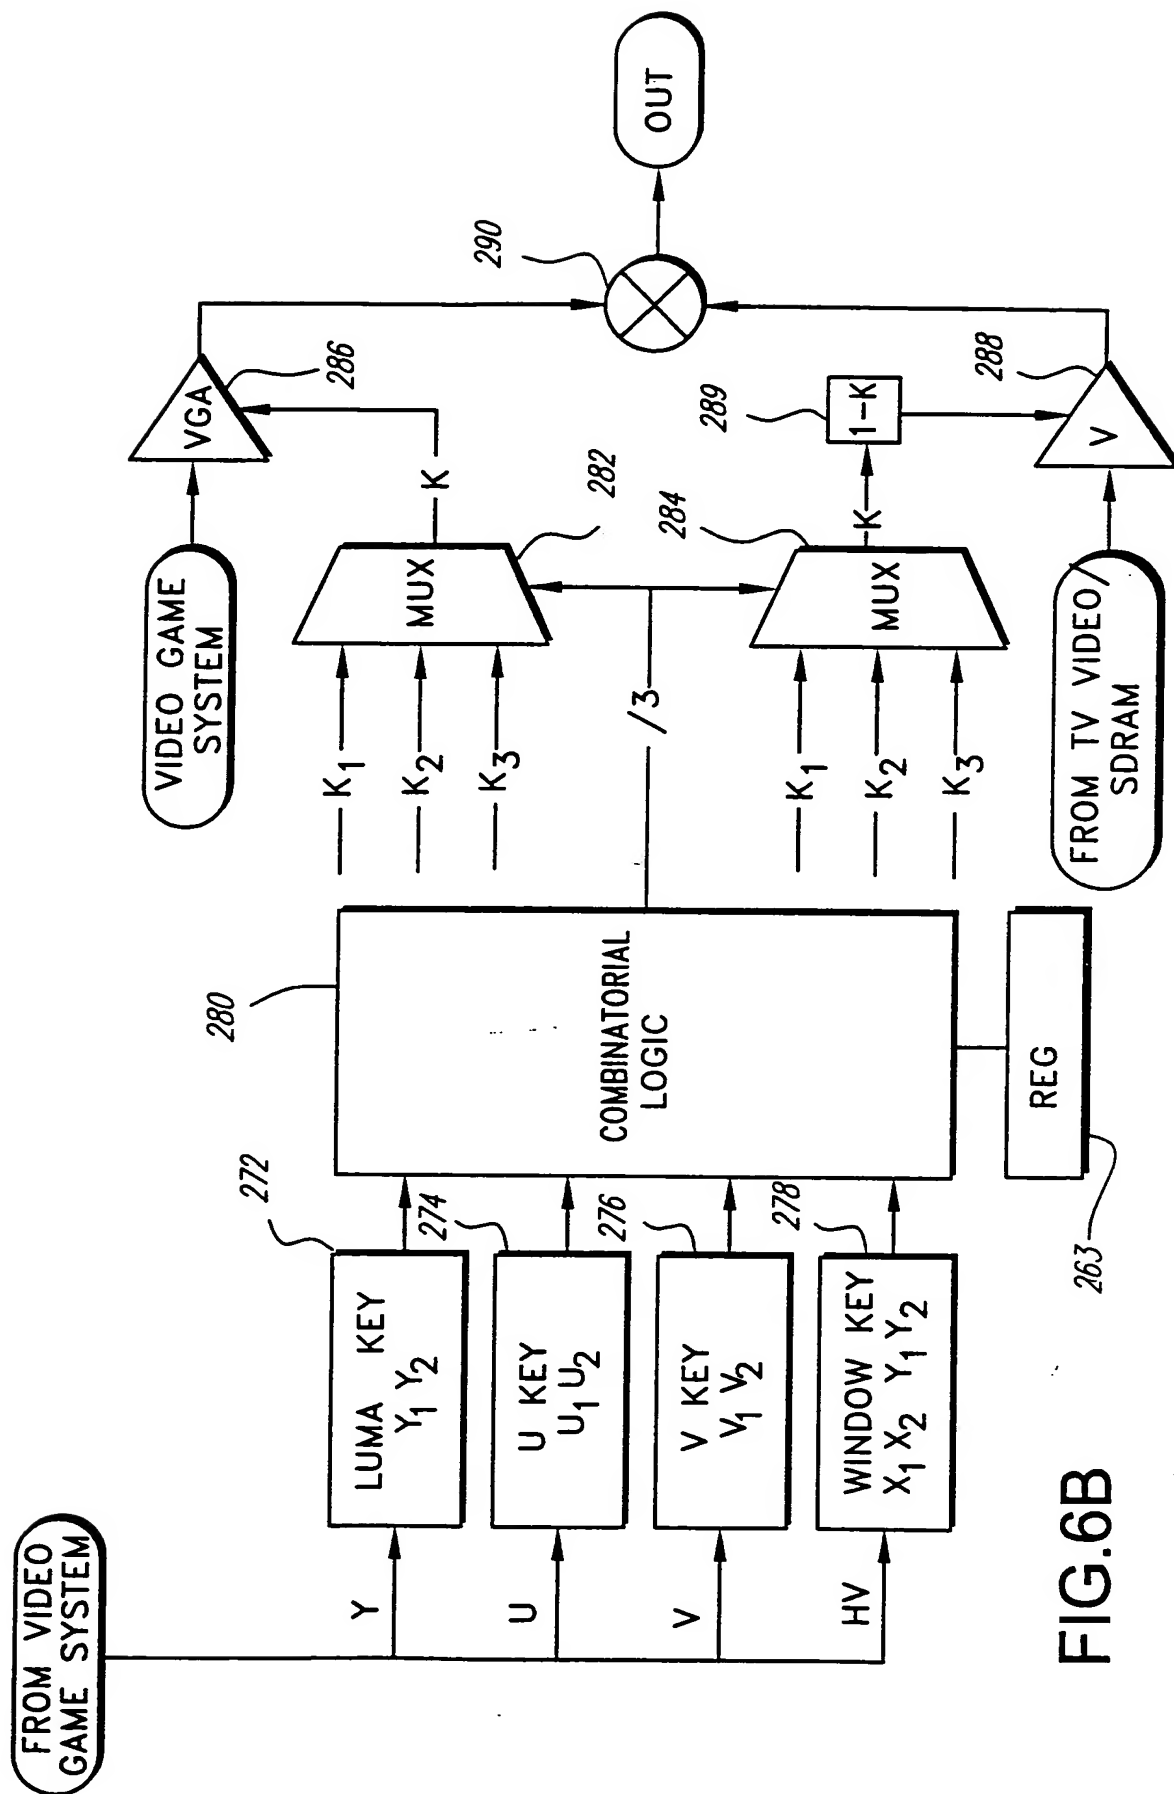


FIG. 6B

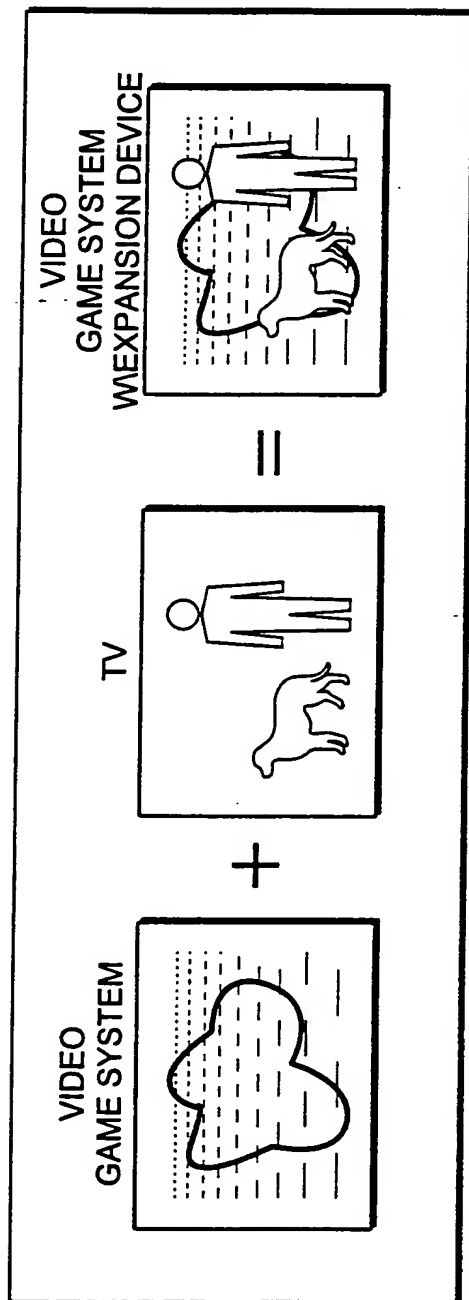


Fig. 6C

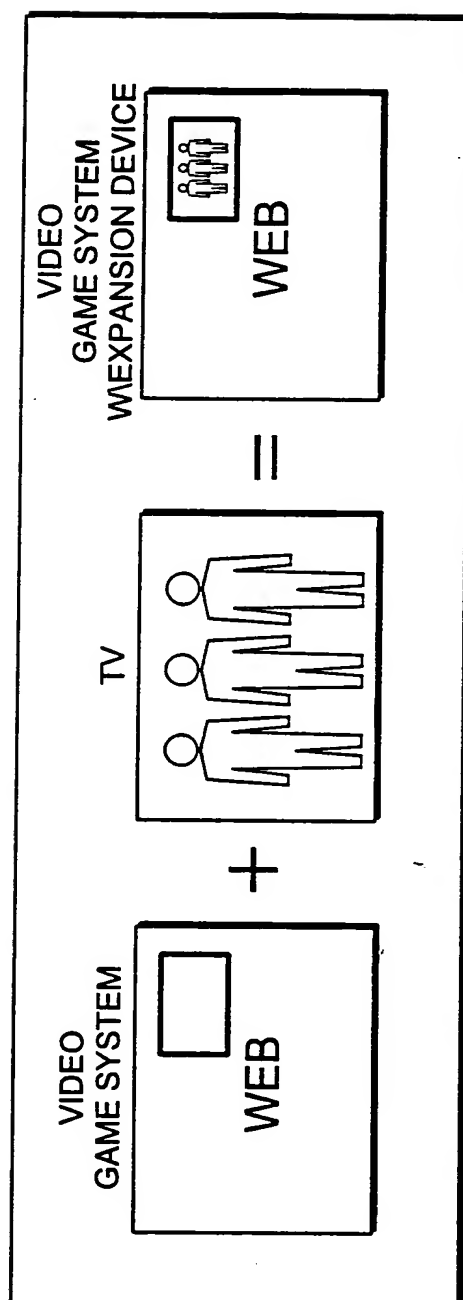


Fig. 6D

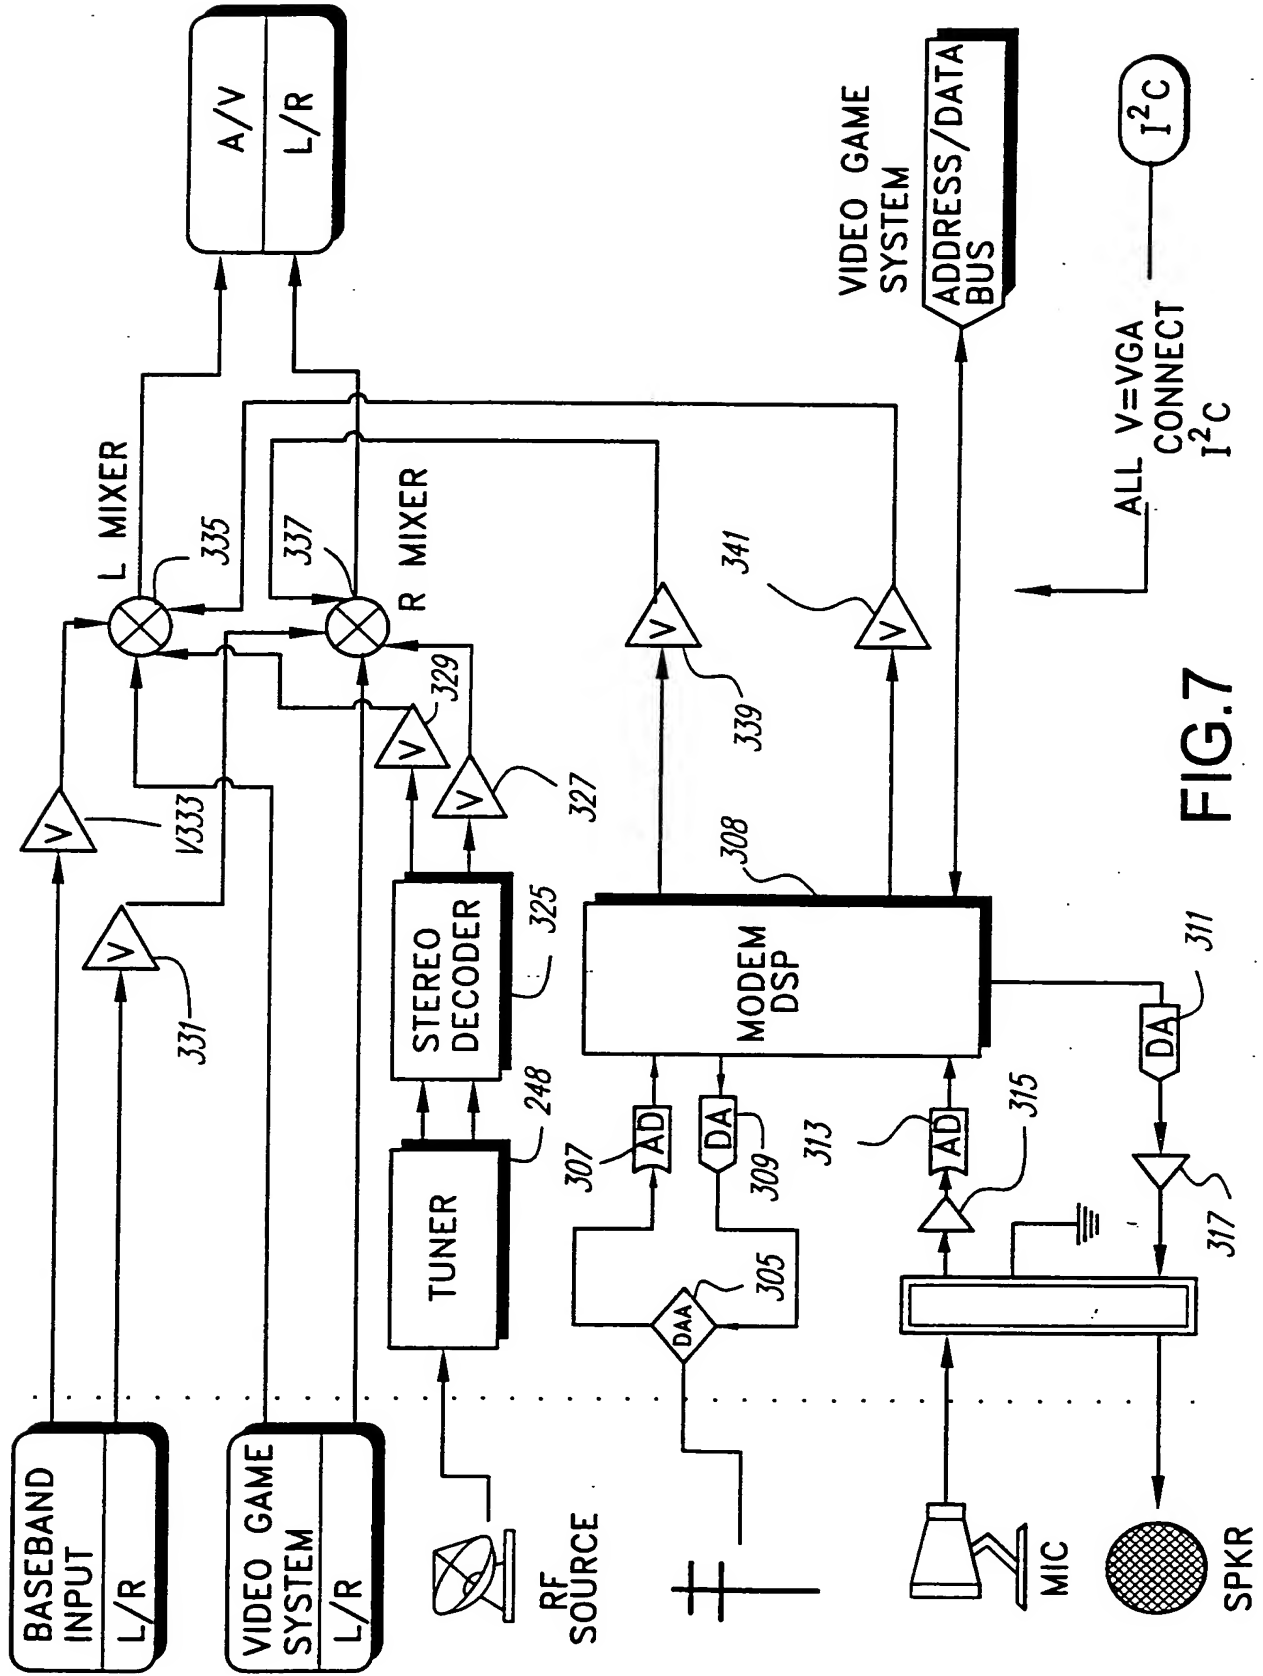


FIG. 7

Fig. 8

NAME	R/W	DESCRIPTION
DISK STATUS	R	READ: DISK STATUS
LBA WRITE ADDRESS	W	WRITING TO THIS ADDRESS CAUSES THE CONTENTS OF THE SECTOR BUFFER TO BE WRITTEN TO THE LBA POINTED TO BY THIS LBA WRITE ADDRESS. THE BUFFER COUNTER IS RESET.
LBA READ ADDRESS	W	WRITING TO THIS ADDRESS CAUSES THE CONTENTS OF THE LBA POINTED TO BY THIS LBA READ ADDRESS TO BE READ INTO THE SECTOR BUFFER. THE BUFFER COUNTER IS RESET.
1 ² C S0' OWN ADDRESS REGISTER	R/W	ES0=0 READ/WRITE: OWN ADDRESS
1 ² C S0 DATA REGISTER	R/W	ES0=1 READ/WRITE: 1 ² C DATA
1 ² C S1 CONTROL STATUS REGISTER	R/W	READ: STATUS WRITE: CONTROL
1 ² C S2 CLOCK REGISTER	R/W	READ/WRITE: CLOCK SCALE VALUE
1 ² C S3 INTERRUPT VECTOR	R/W R	ES0=0: READ/WRITE: INTERRUPT VECTOR ES0=1: READ: INTERRUPT VECTOR ACK CYCLE
MODEM IN	R	READ: MODEM STATUS & DATA
MODEM OUT	R/W	WRITE MODEM DATA READ MODEM OUT STATUS
MODEM OUT CONTROL	W	SEPARATE REGISTER TO CONTROL MODEM WRITE FUNCTIONS
SECTOR BUFFER	R/W	512 BYTE SECTOR BUFFER FOR THE HARD DRIVE. THE POINTER INTO THIS BUFFER IS INCREMENTED BY FOUR BYTES EACH TIME THE BUFFER IS READ OR WRITTEN. AFTER 512 BYTES ARE ACCESSED THE POINTER WRAPS AROUND.
VIDEO/INTERCAST SPACE	R/W	
INTERRUPT STATUS REGISTER	R/W	READ: EXPANSION DEVICE SUPPORTS A SINGLE, 32 BIT INTERRUPT STATUS REGISTER FOR THE VIDEO GAME SYSTEM. VARIOUS BITS WILL BE ALLOCATED TO PROCESSES AS NEEDED DURING DESIGN. WRITE: INTERRUPT MASK

Fig. 9

FUNCTION	INT
MODEM DATA IN READY	Y
MODEM SEND READY	Y
RTC ALARM	Y
I ² C INTERRUPT	Y
INTERCAST	Y
DISK READ DATA READY	Y
DISK WRITE COMPLETED	Y
COUNTER AT 0	N

Fig. 10

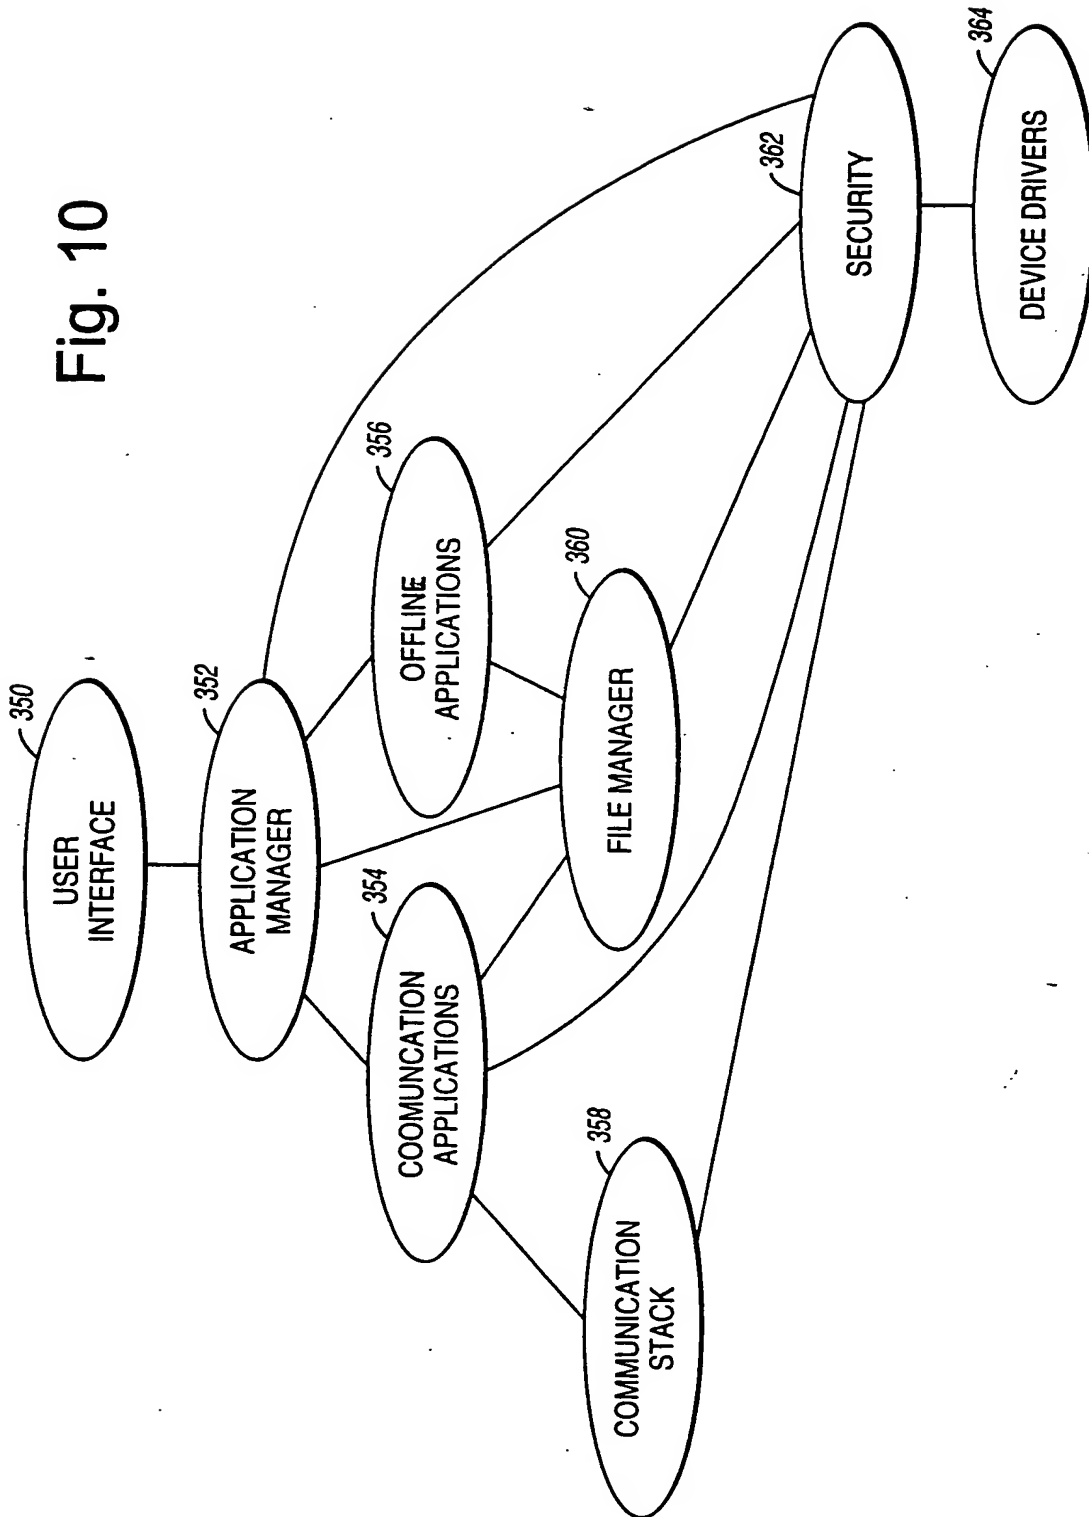
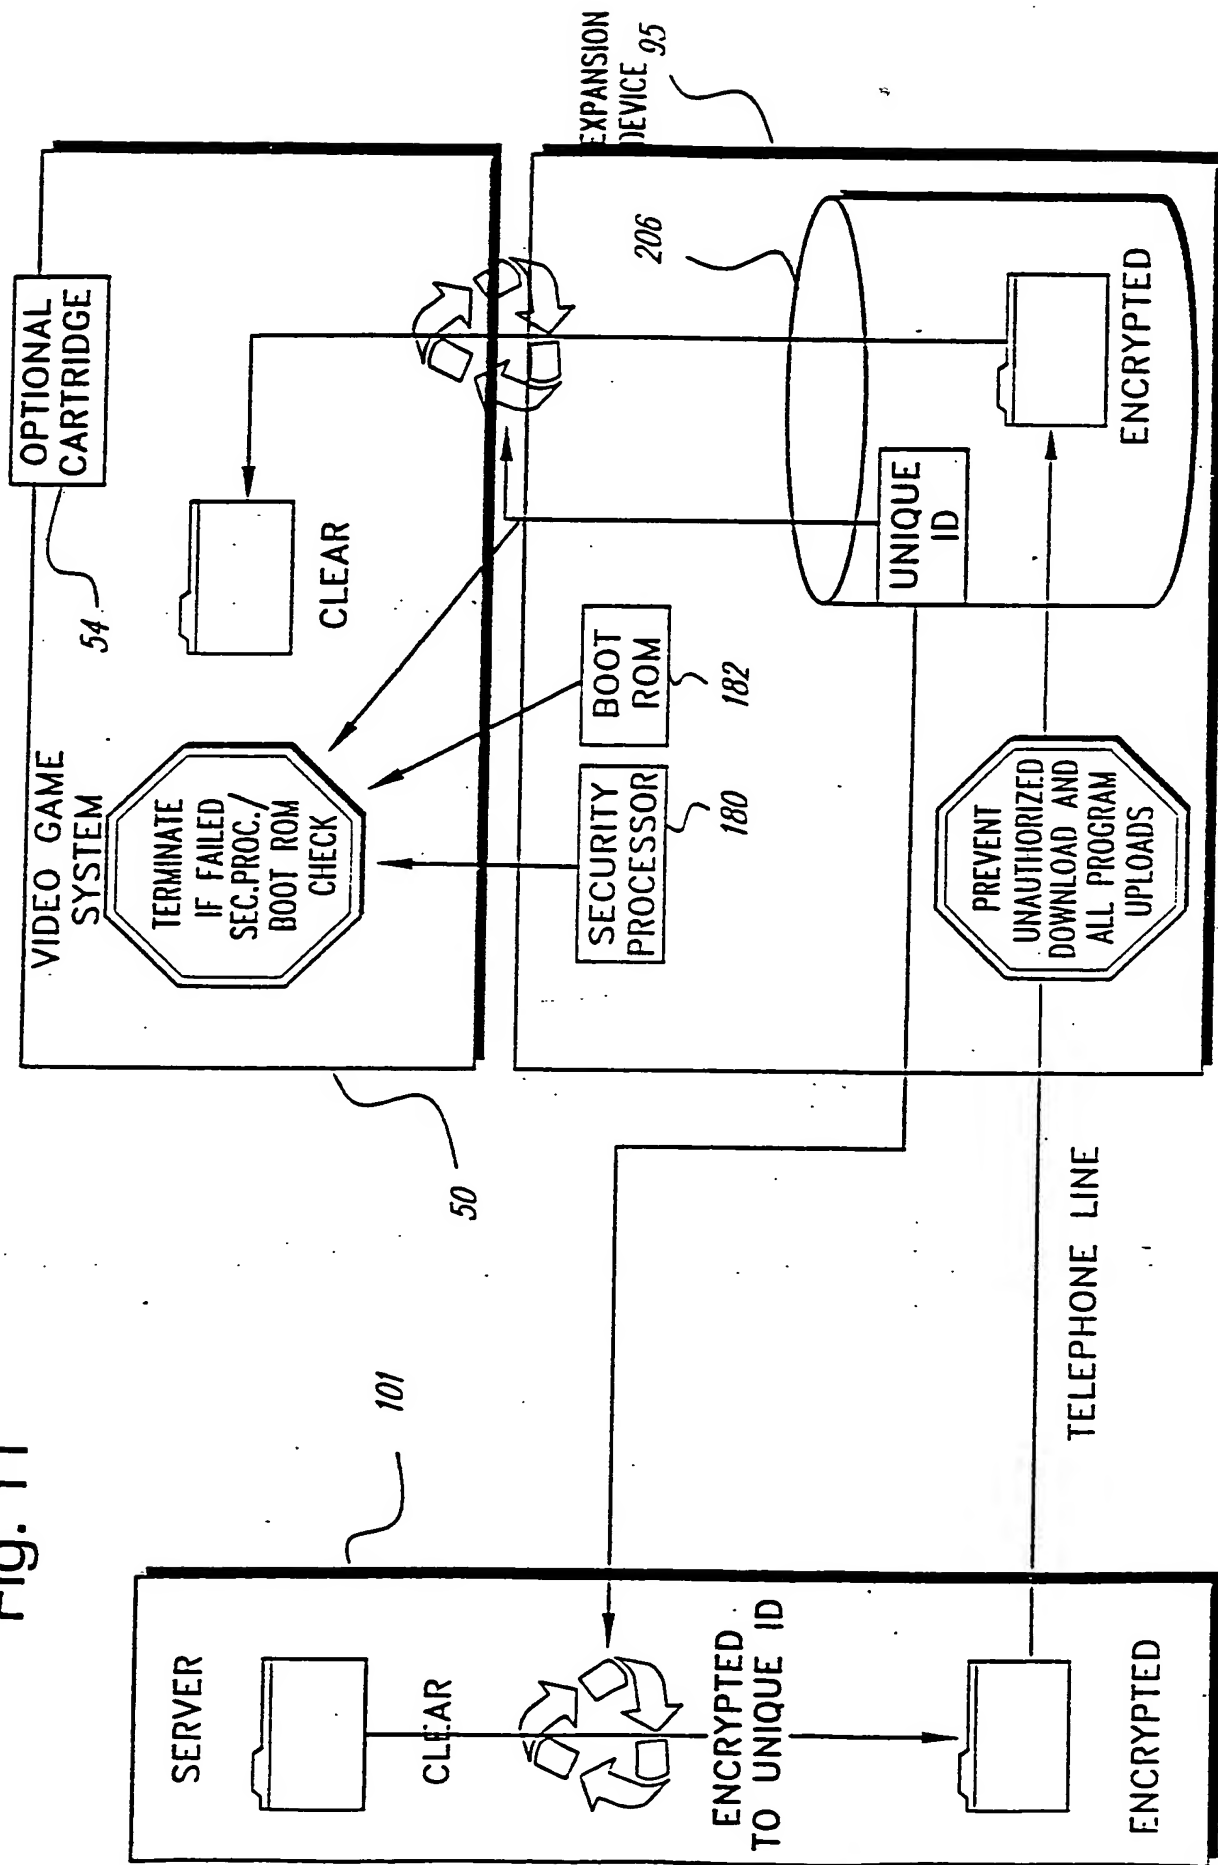


Fig. 11



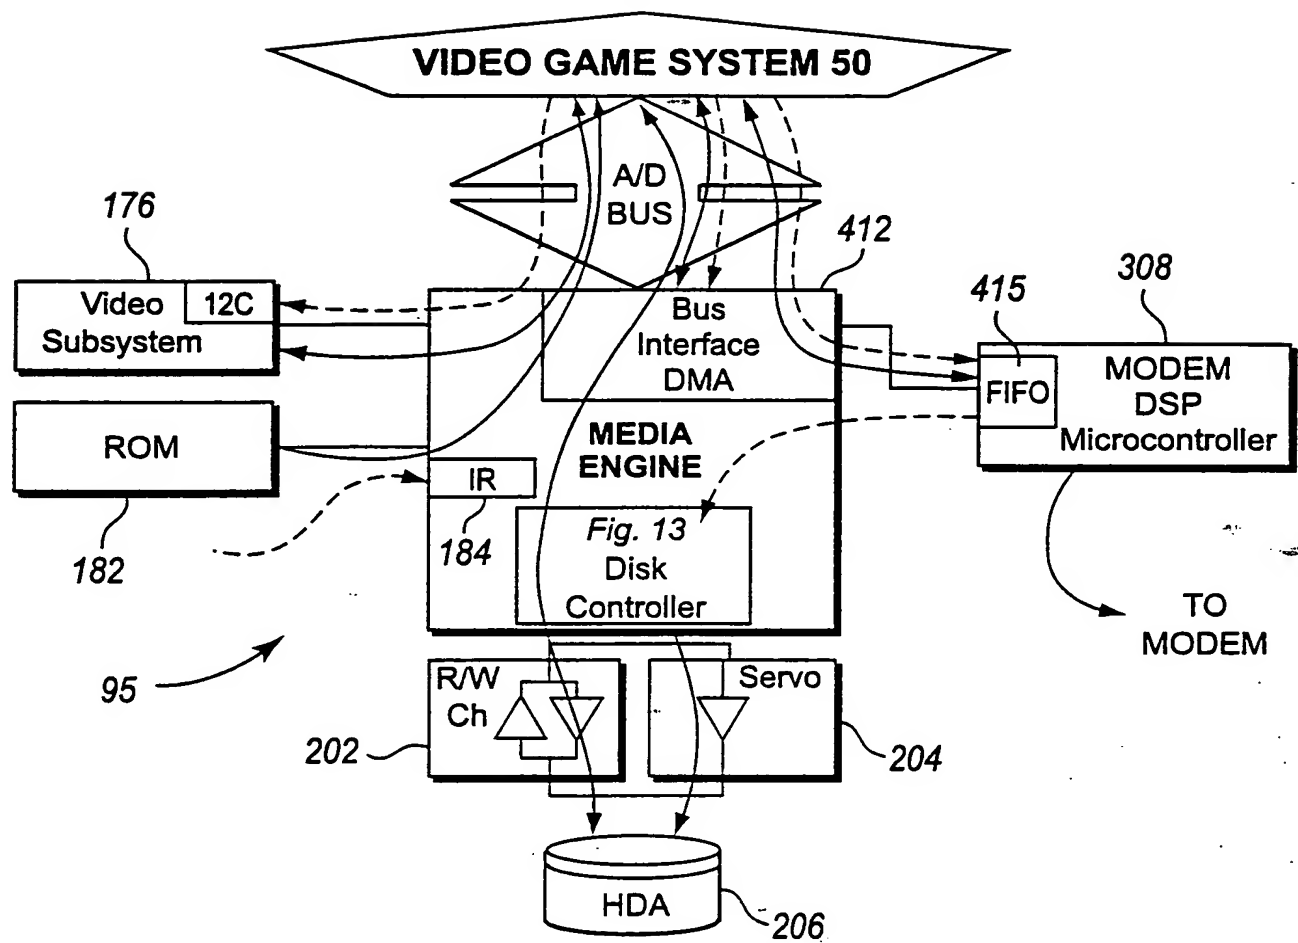


FIG. 12

FIG. 13


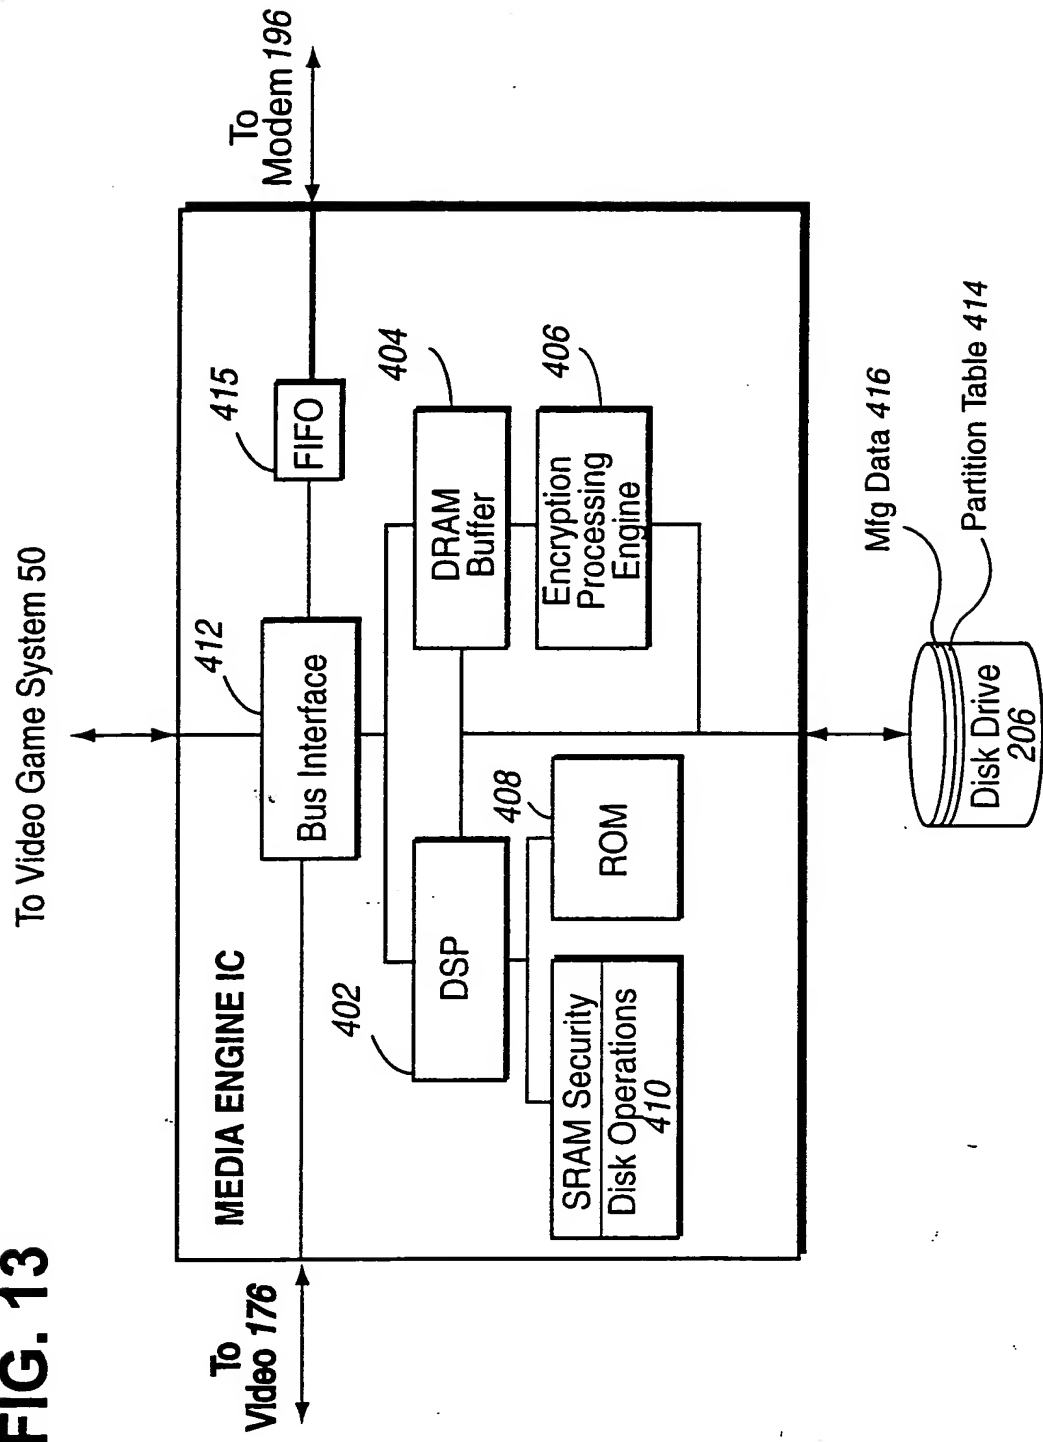


FIG. 14

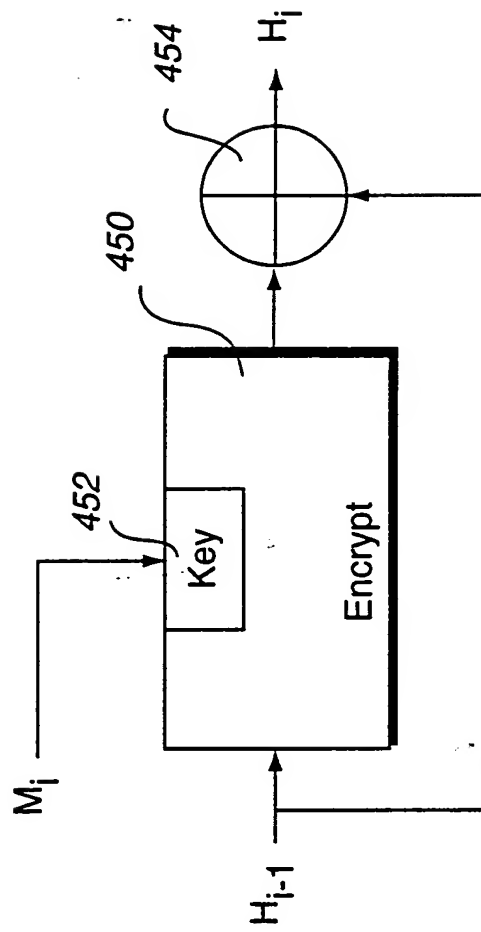

BoxIDPacket

BoxID	Pad	Message ID	Direction Bit	Pad	Message Counter	Pad	Hash
-------	-----	---------------	------------------	-----	--------------------	-----	------

FIG. 15A

Delete

BoxID	GameID	Pad	Message ID	Direction Bit	Pad	Message Counter	Pad	Hash
-------	--------	-----	---------------	------------------	-----	--------------------	-----	------

FIG. 15B

GamePresentPacket

BoxID	GameID	Pad	Message ID	Direction Bit	Pad	Message Counter	Pad	Hash
-------	--------	-----	---------------	------------------	-----	--------------------	-----	------

FIG. 15C

GameIDsPacket

Offset	Size	Name	Size	Name	Size	Name	Description
...	...	IDcount	...	Reserved	...	Reserved	Total gameIDs
...	...	GameID ₁	...	Status ₁	...	Reserved ₁	First gameID
...

FIG. 15D

ContextPacket

GameID	Success=FFh Fail=00h	Size 0	Size 1	Size 2	Fill with 00f	C & R Seed for Browser, otherwise fill with 00f
--------	-------------------------	-----------	-----------	-----------	------------------	--

FIG. 15E

GRPacket

BoxID	Pad	Game Code	Pad	Message ID	Direction Bit	Pad	Message Counter	Pad	Hash
-------	-----	--------------	-----	---------------	------------------	-----	--------------------	-----	------

FIG. 15F

DLPacket

NAME	DESCRIPTION
gameID PAD tLengthReq PAD Sig PAD ResetCounter PAD	HEADER 0x0001 - 0xFFEF = gameID (Allocated by Manufacturer) Random Padding Number of Chunks required for application Random Padding Hash of Active, protected partitions 0 & 1 Random Padding Reset Both Counts to 0 if ResetCounter = 174 Random Padding
Permissions0 PAD pLengthReq0 pLengthUsed0 PAD	Partition 0 (ENCRYPTED PROGRAM) 0 = ReadOnlyEncrypted, 1 = ReadOnlyClearText Random Padding Number of Chunks reserved in partition Number of Chunks active in partition Random Padding
Permissions1 PAD pLengthReq1 pLengthUsed1 PAD	Partition 1 (READ ONLY DATA) 1 = ReadOnlyClearText Random Padding Number of Chunks reserved in partition Number of Chunks active in partition Random Padding
Permissions2 PAD pLengthReq2 pLengthUsed2 PAD	Partition 2 (READ/WRITE DATA) 2 = Read/Write ClearText Random Padding Number of Chunks reserved in partition Number of Chunks active in partition Random Padding
PAD BoxID PAD MessageID Direction Hash	Trailer Random Padding BoxID Fill with random padding Message Counter Set to 0 Davies-Meyer check sum

FIG. 15G

START DL PACKET

VALUE	NAME	DESCRIPTION
limitedID < = 8 gameID	gameID tLengthReq Sig	HEADER 0x8000 – 0xFFEF = gameID Disk (Allocated by Manufacturer) Number of Chunks required for application Hash of Active, protected partitions
0 0 0	Permissions0 pLengthReq0 pLengthUsed0	Partition 0 (ENCRYPTED PROGRAM) 1 = ReadOnlyEncrypted, 2 = ReadOnlyClearText Number of Chunks reserved in partition Number of Chunks active in partition
1 0 0	Permission1 pLengthReq1 pLengthUsed1	Partition 1 (READ ONLY DATA) 2 = ReadOnlyClearText Number of Chunks reserved in partition Number of Chunks active in partition
2 tLengthReq < = tLengthReq	Permissions2 pLengthReq2 pLengthUsed2	Partition 2 (READ/WRITE DATA) 3 = Read/Write ClearText Number of Chunks reserved in partition Number of Chunks active in partition
gameID 0 FFh Hash	BoxID MessageID Direction Hash	Trailer BoxID Message Counter Set to 0 Davies-Meyer Hash

FIG. 16

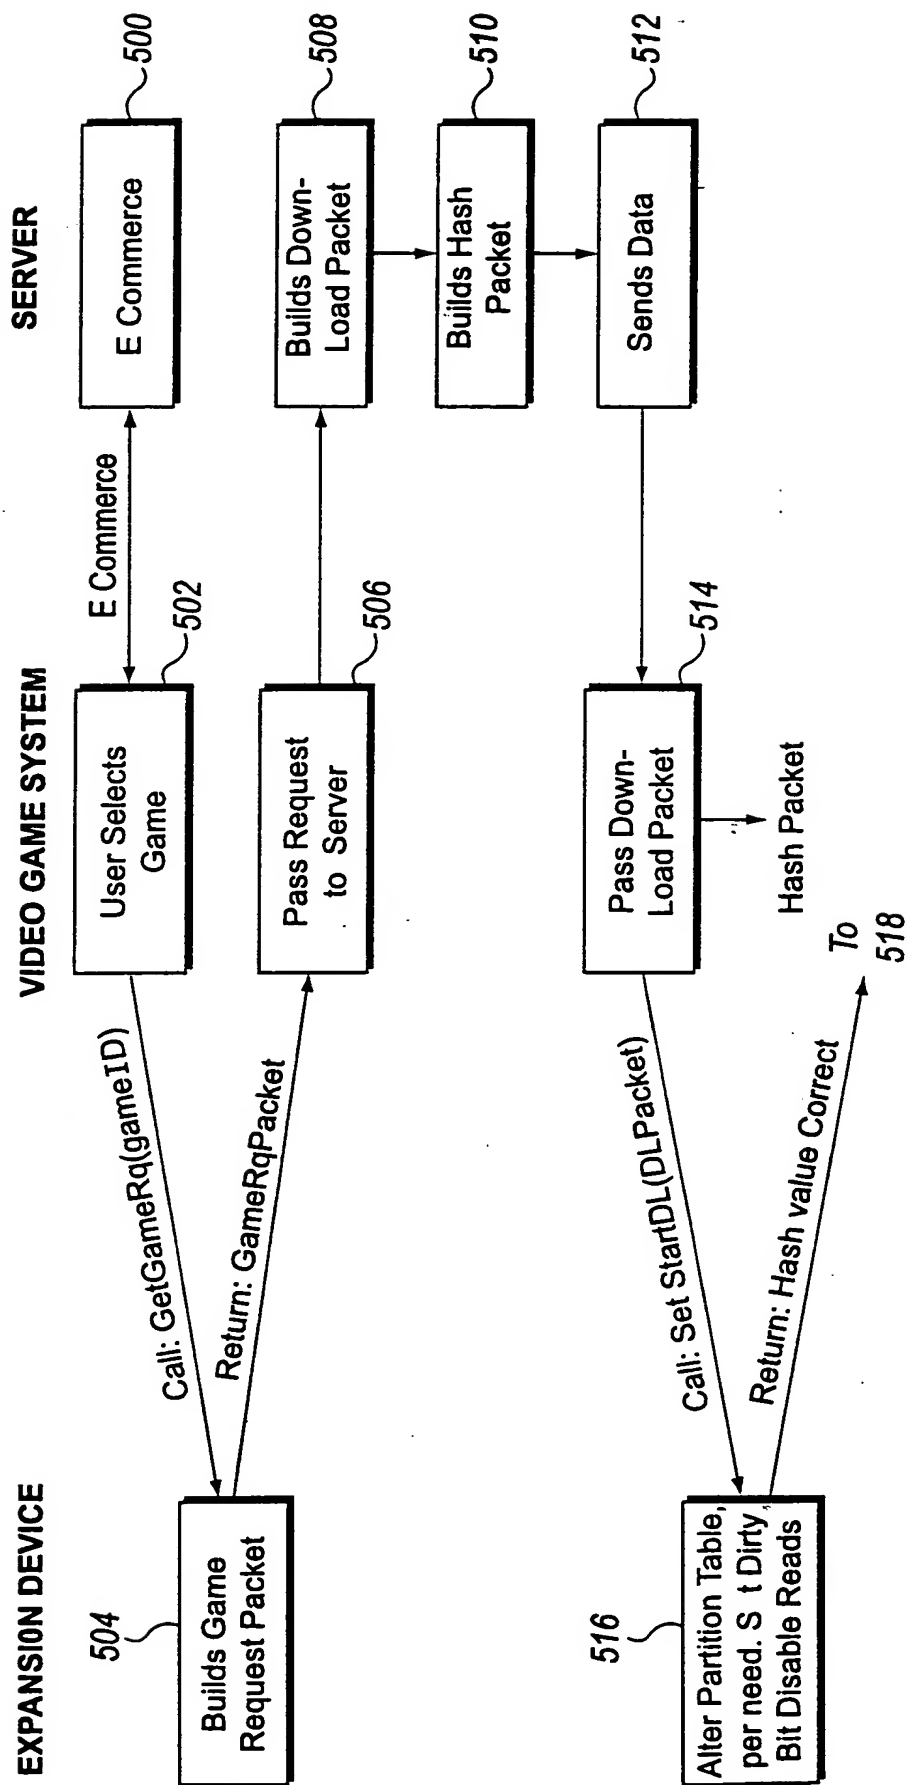


FIG. 17A

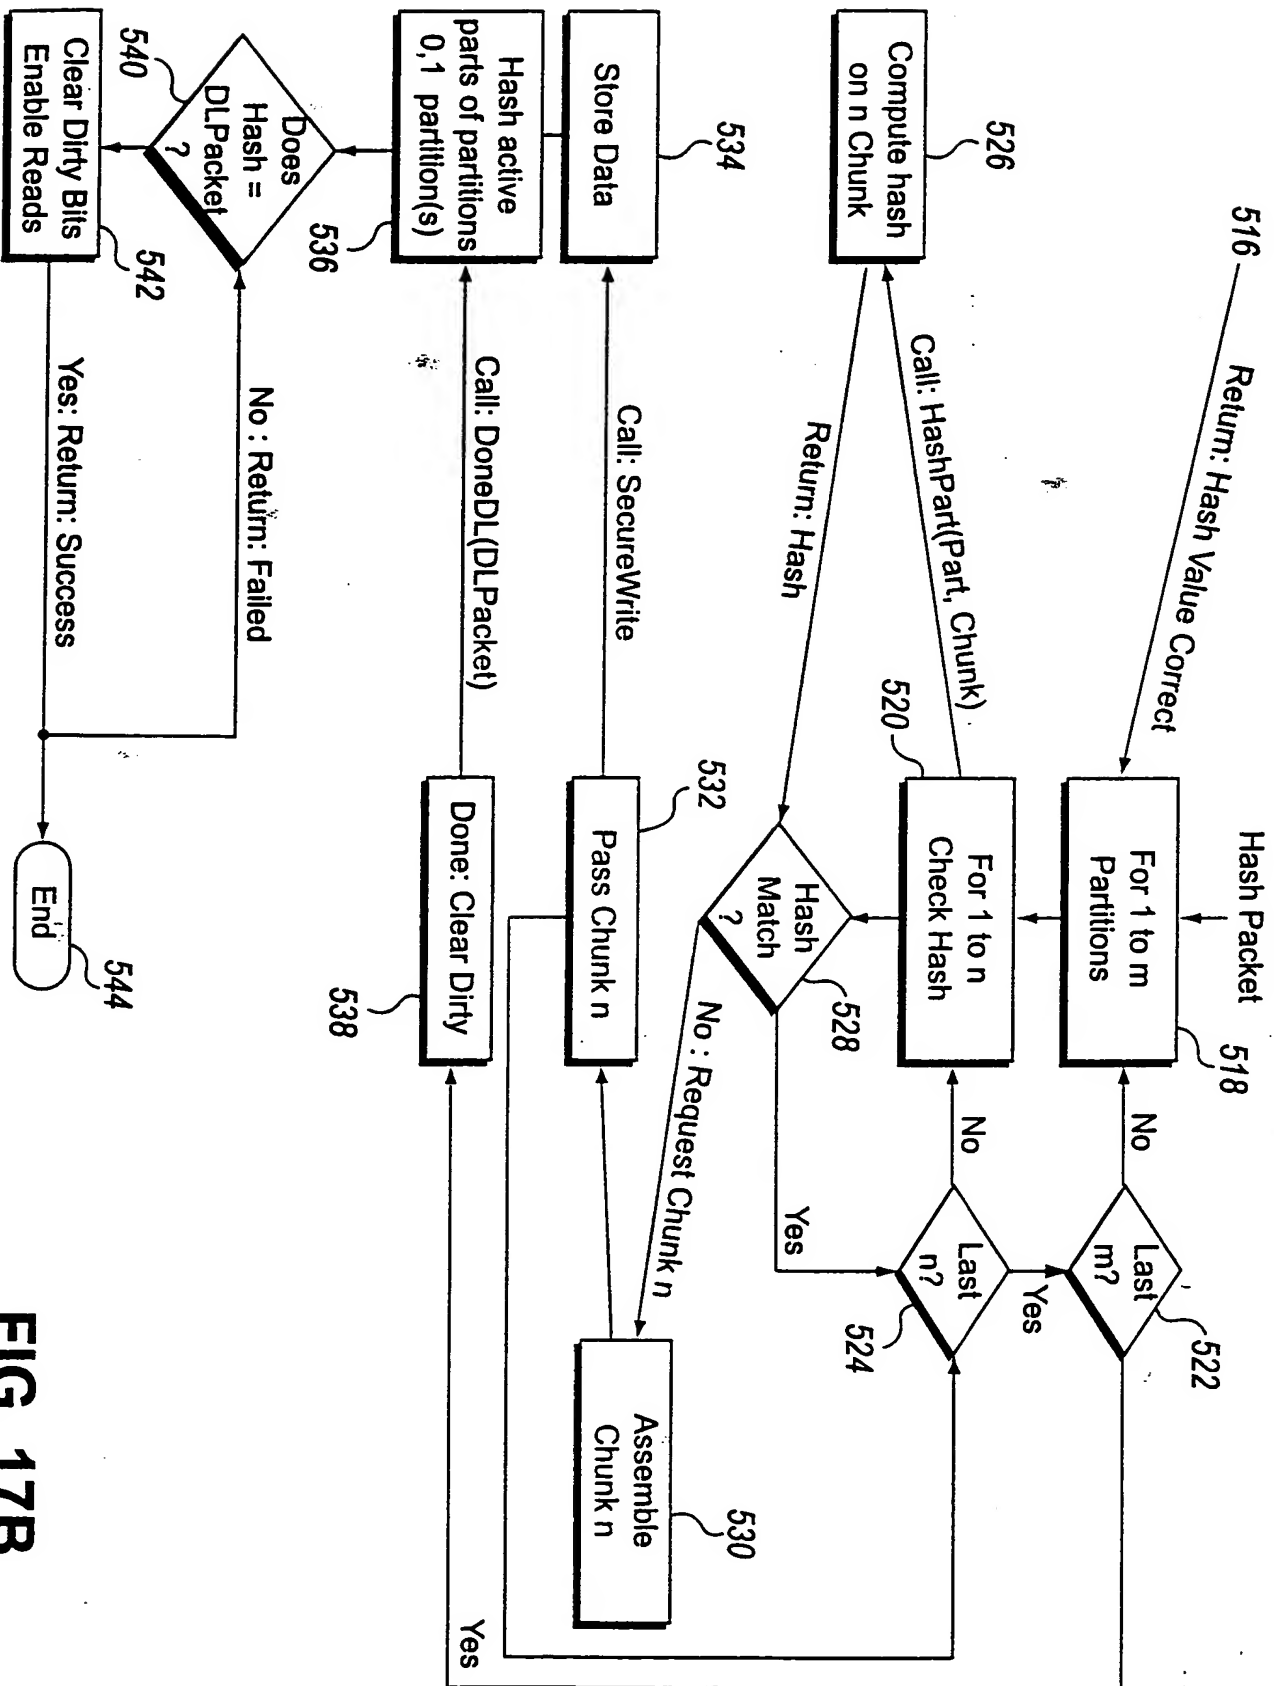


FIG. 17B

OFFSET	SIZE	NAME	USAGE
...	...	GameID	
...	...	Status	(Fig. 18B)
...	...	Start Chunk 0	
...	...	Length Chunks 0	
...	...	Used Chunks 0	
...	...	Start Chunk 1	
...	...	Length Chunks 1	
...	...	Used Chunks 1	
...	...	Start Chunk 2	
...	...	Length Chunks 2	
...	...	Used Chunks 2	
...	...	Reserved	

FIG. 18A

BITS	NAME	USAGE
0	Dirty	Update in process
1	Compact	Compaction in process on this partition
2	Used ₀	Indicates that partition 0 is used
3	Used ₁	Indicates that partition 1 is used
4	Used ₂	Indicates that partition 2 is used
5	Reserved	
6	Reserved	
7	Reserved	

FIG. 18B